



**DFM Industrial measures flow rate of liquid in pipeline, also operation time and modes of pump. For liquids of various viscosity – water, gasoline, diesel, diesel oil, fuel oil.**



Industrial systems



Storage of petroleum products



Diesel-generator stations



Fuel tanker trucks



Sea and river vessels

## Embedded flow computer on IoT Burger Technology


Parameters and counters	Interface CAN(J1939)/S6	Display	Internal meter memory
Instant liquid consumption	●	●	
Total liquid consumption counter	●	●	●
Liquid consumption in "Idle", "Optimal", "Overload", "Tampering", "Interference" mode counter	●		●
Engine operation time in "Idle", "Optimal", "Overload", "Tampering", "Interference" mode counter	●	●	●
Clearable liquid consumption and engine operation time counters	●	●	●
Differential liquid consumption	●	●	
Temperature in the measuring chamber	●	●	●
Temperature correction coefficient value	●		●
External power supply voltage	●		
Battery charge in percentage of the maximum	●	●	●

Detected events: air tampering, magnetic field interference, high/low level of supply voltage, ignition switched on/off

Self-diagnostics of flow meter's operability

## Network operation via S6 Technology

Single cable bus for configuration, power supply and signal transfer.

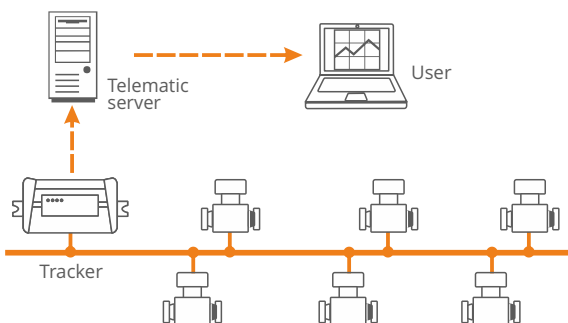

DFM Industrial models	7	25
Min - max flow rate	0.72 - 7.2 m <sup>3</sup> /h	2.5 - 25 m <sup>3</sup> /h
Maximum pressure	16 bar	
Interface	- CAN(J1939)/S6 interface - pulse output - autonomous (without interface)	
Kinematic viscosity of liquid	0,55 - 300 mm <sup>2</sup> /s (cSt)	
Ambient operation temperature	from - 20 to +60 °C	
Operating principle	oval gears rotation	
Connection to pipeline	flange, thread	
Battery lifetime	up to 36 months	



phone +420 910 122 429  
WhatsApp +420 704 067 474  
e-mail: sales@jv-technoton.com  
www.jv-technoton.com

