

Programmable signal converter MasterCAN DAC15


Functions:

Signal transformation:

- From digital to analog (5 channels)
- From analog to digital (1 channel)

Purposes:

- Vehicle electronics
- Vehicle telematics

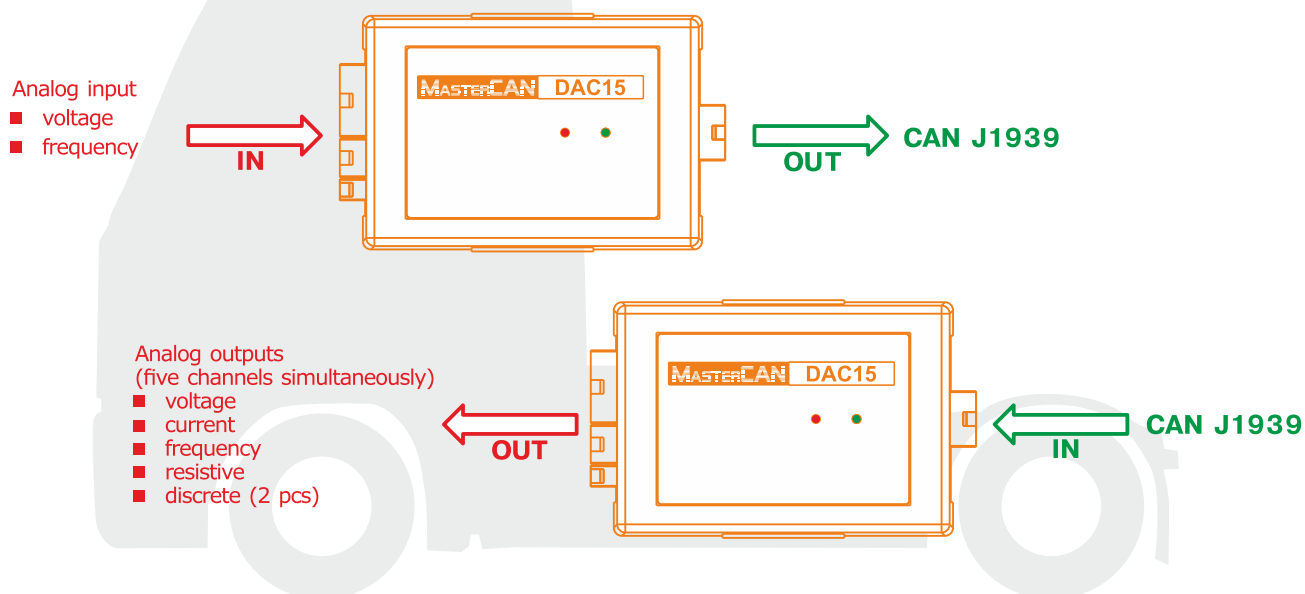

Features

- Complies with S6 concept
- Selection from over 3000 CAN parameters
- Possibility to adjust amplitude and frequency of analog signal


Application

- Axle load sensor connection to CAN bus
- Vehicle analog signals transmission to telematics terminal via CAN interface
- Control of standard fuel level indicator when using fuel level sensors with CAN output signal
- Analog dashboard integration with CAN bus

Technical specifications:

Digital interface	CAN J1939/S6
Supply voltage range	9 - 45 V
Current consumption (12 V)	not more than 500 mA
Current consumption (24 V)	not more than 250 mA
Operation temperature range.....	- 40...+ 85 °C
Overall dimensions	95x45x25 mm

Interfaces

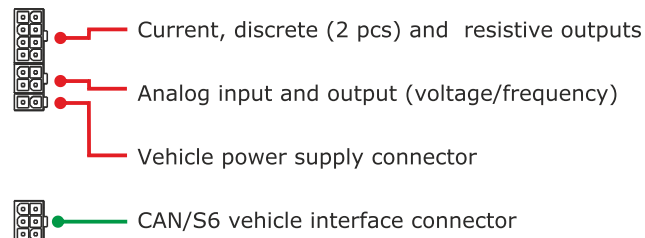

phone +420 910 122 429
 WhatsApp +420 704 067 474
 e-mail: sales@jv-technoton.com
 www.jv-technoton.com

